




INDEPENDENT TEST LABORATORY REPORT No. 27804

EVERBRITE - 2' X 2' LED TROFFER LUMINAIRE, CAT# TR22L13585SIS1
WITH WHITE INTERIOR AND DIFFUSE FLAT PLASTIC LENS
THIRTY SIX LEDS. LUMINAIRE OUTPUT = 2571 LMS

ONE AMPEROR ELECTRONICS ANP90-48P1Y DRIVER OPERATING AT 120 VAC AND 45.1 WATTS

INTENSITY (CANDLEPOWER) SUMMARY OUTPUT LUMENS

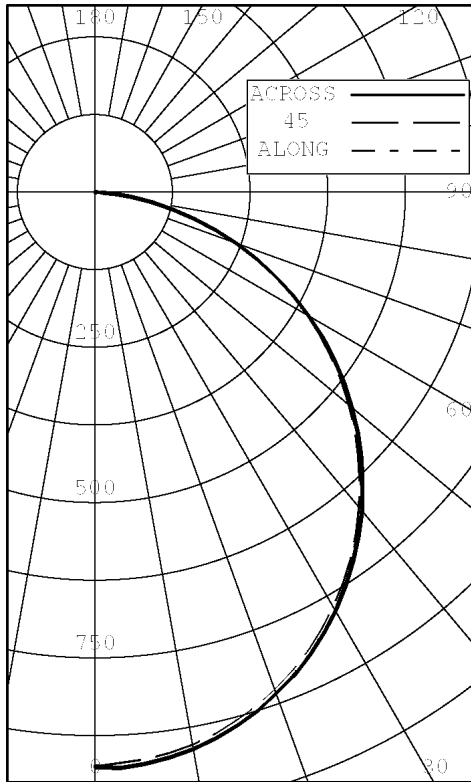

| ANGLE | ALONG 22.5 | 45 | 67.5 | ACROSS | OUTPUT LUMENS |
|-------|------------|-----|------|--------|---------------|
| 0 | 926 | 926 | 926 | 926 | 926 |
| 5 | 924 | 920 | 917 | 921 | 924 |
| 10 | 910 | 906 | 904 | 908 | 911 |
| 15 | 887 | 883 | 881 | 885 | 889 |
| 20 | 856 | 852 | 850 | 855 | 858 |
| 25 | 818 | 815 | 813 | 818 | 822 |
| 30 | 773 | 770 | 769 | 773 | 777 |
| 35 | 722 | 718 | 718 | 723 | 725 |
| 40 | 665 | 661 | 662 | 666 | 669 |
| 45 | 602 | 600 | 599 | 604 | 607 |
| 50 | 535 | 534 | 533 | 537 | 540 |
| 55 | 466 | 464 | 464 | 468 | 470 |
| 60 | 393 | 391 | 391 | 395 | 396 |
| 65 | 317 | 315 | 316 | 319 | 321 |
| 70 | 241 | 239 | 240 | 243 | 244 |
| 75 | 164 | 163 | 162 | 165 | 166 |
| 80 | 92 | 91 | 92 | 93 | 94 |
| 85 | 34 | 33 | 34 | 35 | 36 |
| 90 | 0 | 0 | 0 | 0 | 0 |


ZONAL LUMENS AND PERCENTAGES

| ZONE | LUMENS | % LUMINAIRE |
|--------|--------|-------------|
| 0-30 | 713 | 27.74 |
| 0-40 | 1163 | 45.24 |
| 0-60 | 2042 | 79.44 |
| 0-90 | 2571 | 100.00 |
| 40-90 | 1408 | 54.76 |
| 60-90 | 528 | 20.56 |
| 90-180 | 0 | 0.00 |
| 0-180 | 2571 | 100.00 |

EFFICACY (LUMENS PER WATT): 57.0

*** THIS IS AN ABSOLUTE TEST ***

LUMINOUS LENGTH: 23.370 INS
WIDTH: 23.370 INS

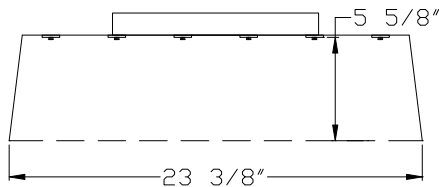

LUMINANCE SUMMARY CD./SQ.M.

S/MH: 1.2
SC: 1.2

| ANGLE | ALONG | 45 | ACROSS |
|-------|-------|------|--------|
| 45 | 2418 | 2413 | 2443 |
| 55 | 2303 | 2303 | 2334 |
| 65 | 2128 | 2129 | 2165 |
| 75 | 1797 | 1780 | 1830 |
| 85 | 1098 | 1114 | 1165 |

CERTIFIED BY:

Ryder Tunnay DATE: SEP 28, 2010

PREPARED FOR:

EVERBRITE LLC
GREENFIELD, WI

TESTED IN ACCORDANCE WITH IES PROCEDURES.